



Architectural



SIGNAGE
& PRINT

Crystal Frosted Vinyl

Crystal Frosted Vinyl is a monomeric self-adhesive frosted film with crystal glitter for a stylish, affordable way to enhance privacy and décor. The glitter effect adds a subtle sparkle, creating a premium, eye-catching finish. Easy to install and remove, it's perfect for windows, partitions, and glass doors. Its self-adhesive backing ensures a smooth application without the need for water or extra glue, making it ideal for short- to medium-term indoor use where a touch of elegance is desired. Made for internal use. Not designed to receive direct sunlight.

Technical Performance Data

Calculated on 3mm glass

Natural Light & Glare	
VLT (Visible Light Transmission)	40%
Visible Light Reflectance (internal)	n/a
Glare Reduction	54%

Solar Energy	
Transmittance	n/a
Reflectance	n/a
Absorption	n/a
Total Solar Energy Rejected (TSER)	n/a

Thermal Energy	
Shading Coefficient	n/a
Solar Heat Gain Coefficient	n/a
U-Value - (W/m ² K)	5.8
R-Value - (m ² KW)	0.17

Ultraviolet & Infrared	
UV Rejection	75%
IR Rejection	65%
Anti Fade Rating (0-100)	69

Manufactured Specifications	
Thickness	100 µm
Structure:	Monomeric 120g
Composition	PVC
Warranty	See lifespan
Colour	Glitter Clear
Ink Compatibility	n/a
Stock Code	GLIT127

For Reference Only: Technical specifications can differ between batches. Dura Vista retains the right to update this information at any time without notice. **Warranty covers material replacement for minimum years of lifespan.**

Product Care & Maintenance:

After installation allow 30 – 60 days to cure. Never try to remove bubbles during the curing process. After curing you may clean the windows with soapy water and non-abrasive cloths or sponges and paper towels. Do not attempt to clean the film with chemicals containing ammonia or abrasives.

Installation Guidelines

Vertical Installation on standard glass surface

Single Pane Glass	
Clear Single Pane	✓
Tinted Single Pane	✓
PVB / Laminated Glass with correct spacing	✓
Thermally Toughened Safety Glass	✓


Double Pane / Double Glazing	
Clear Double Pane	✓
Tinted Double Pane	✓
Gas-Filled Double Pane (Low-E)	✓
Glass Panes Exceeding 2 SQM	✓
PVB / Laminated Glass with correct spacing	✓
Thermally Toughened Safety Glass	✓
Glass with poor quality edging and spacing	X

Safety Guideline Symbols	Symbol
Safe to install	✓
Unsafe to install	X
Caution, will cause thermal stress	!

Safety Performance	
Peel Strength estimate (gr/inch)	>800
For internal & external use (see warranty)	✓

Lifespan (minimum to maximum)	Years
Indoor Use (No UV Exposure)	4 - 5 yrs
Indoor Use (Direct UV or Partial UV)	1 - 3 yrs
Outdoor Use (Shaded or Partial UV Exposure)	1 - 2 yrs
Outdoor Use (Full UV)	0 - 1 yrs

Guidelines provided are based on a single glass surface up to 2.5m² with no single length or width greater than 2 meters.

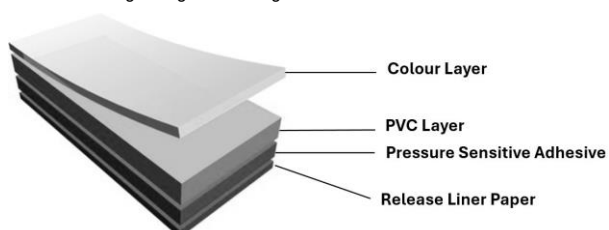

Distributed by: **Tint Zone**

Anthony - 066 224 3772

info@tintzone.co.za | tintzone.co.za