



Architectural



SIGNAGE
& PRINT

Dark Grey Sandblast

Dark Grey Sandblast is a polymeric frosted PVC film which offers an elegant, modern finish that enhances privacy while allowing natural light to filter through. Its durable, self-adhesive design ensures easy application and long-term performance—ideal for offices, homes, or retail spaces. The film is moisture-resistant, UV-stable, and can be removed cleanly without residue, making it a cost-effective alternative to etched glass. Perfect for decorative branding or subtle light diffusion.

Technical Performance Data

Calculated on 3mm glass

Natural Light & Glare

VLT (Visible Light Transmission)	40%
Visible Light Reflectance (internal)	n/a
Glare Reduction	54%

Solar Energy

Transmittance	n/a
Reflectance	n/a
Absorption	n/a
Total Solar Energy Rejected (TSER)	n/a

Thermal Energy

Shading Coefficient	n/a
Solar Heat Gain Coefficient	n/a
U-Value - (W/m ² K)	5.8
R-Value - (m ² K/W)	0.17

Ultraviolet & Infrared

UV Rejection	89%
IR Rejection	61%
Anti Fade Rating (0-100)	75

Manufactured Specifications

Thickness	100 µm
Structure:	Calendared Polymeric 120g
Composition	PVC
Warranty	See lifespan
Colour	Silver Grey
Ink Compatibility	Eco Solvent, UV
Stock Code	DGS152

For Reference Only: Technical specifications can differ between batches. Dura Vista retains the right to update this information at any time without notice. **Warranty covers material replacement for minimum years of lifespan.**

Product Care & Maintenance:

After installation allow 30 – 60 days to cure. Never try to remove bubbles during the curing process. After curing you may clean the windows with soapy water and non-abrasive cloths or sponges and paper towels. Do not attempt to clean the film with chemicals containing ammonia or abrasives.

Installation Guidelines

Vertical Installation on standard glass surface

Single Pane Glass

Clear Single Pane	✓
Tinted Single Pane	✓
PVB / Laminated Glass with correct spacing	✓
Thermally Toughened Safety Glass	✓

Double Pane / Double Glazing

Clear Double Pane	✓
Tinted Double Pane	✓
Gas-Filled Double Pane (Low-E)	✓
Glass Panes Exceeding 2 SQM	✓
PVB / Laminated Glass with correct spacing	✓
Thermally Toughened Safety Glass	✓
Glass with poor quality edging and spacing	X

Safety Guideline Symbols

Safety Guideline Symbols	Symbol
Safe to install	✓
Unsafe to install	X
Caution, will cause thermal stress	!

Safety Performance


Peel Strength estimate (gr/inch)	>800
For internal & external use (see warranty)	✓

Warranty (Minimum to Maximum Lifespan)

Warranty (Minimum to Maximum Lifespan)	Years
Indoor Use (No UV Exposure)	6 - 10 yrs
Indoor Use (Direct UV or Partial UV)	3 - 6 yrs
Outdoor Use (Shaded or Partial UV Exposure)	2 - 5 yrs
Outdoor Use (Full UV)	1 - 3 yrs

Lifespan excludes in fade duration.

Guidelines provided are based on a single glass surface up to 2.5m² with no single length or width greater than 2 meters.

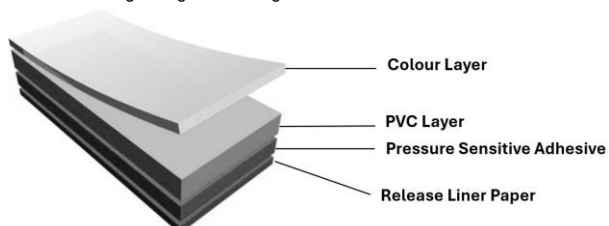

Distributed by: **Tint Zone**

Anthony - 066 224 3772

info@tintzone.co.za | tintzone.co.za