



Architectural

Silver Reflective 15%

Silver Reflective 15% window film has balanced privacy, glare reduction, and heat rejection while maintaining moderate natural light. It blocks up to 99% of UV rays, protects interiors, and enhances energy efficiency. The reflective finish adds a sleek aesthetic and reduces cooling costs, making it an ideal choice for homes or offices. This film is made for internal use.

Technical Performance Data

Calculated on 3mm glass

Natural Light & Glare	
VLT (Visible Light Transmission)	20%
Visible Light Reflectance (internal)	49%
Glare Reduction	72%
Solar Energy	
Transmittance	19%
Reflectance	53%
Absorption	28%
TSER (Total Solar Energy Rejected)	74%
Thermal Energy	
Shading Coefficient	0.33
Solar Heat Gain Coefficient	0.28
U-Value - (W/m ² K)	5.8
R-Value - (m ² K/W)	0.17
Ultraviolet & Infrared	
UV Rejection	99%
IR Rejection	81%
Anti-Fade Rating (0 - 100)	90
Manufactured Specifications	
Thickness	50 µm
Structure	2 Ply
Composition	PET
Warranty	5 Years
Colour	Silver
Stock Code	SILV15

Product Care & Maintenance:


After installation allow 30 – 60 days to cure. Never try to remove bubbles during the curing process. After curing you may clean the windows with soapy water and non-abrasive cloths or sponges and paper towels. Do not attempt to clean the film with chemicals containing ammonia or abrasives.

Installation Guidelines

Vertical Installation on standard glass surface

Single Pane Glazing	
Clear Standard Glass	✓
Thermally Toughened Safety Glass	✓
PVB / Laminated Glass with correct spacing	✓
Glass Panes Exceeding 2 SQM	✓
Low-E Glass	!
Glass with poor quality edging and spacing	X
Double Pane / Double Glazing	
Clear Double Pane	!
Tinted Double Pane	X
Gas-Filled Double Pane (Low-E)	!
Glass Panes Exceeding 2 SQM	!
PVB / Laminated Glass with correct spacing	!
Thermally Toughened Safety Glass	✓
Glass with poor quality edging and spacing	X
Safety Guideline Symbols	
Safe to install	✓
Unsafe to install	X
Caution, will cause thermal stress	!
Safety Performance	
For Internal use only	✓
Peel Strength (gr/inch)	>1800

Guidelines provided are based on a single glass surface up to 2.5 m² with no single length or width greater than 2 meters.

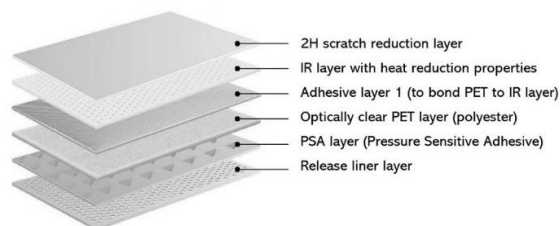

Silver Reflective - 15% Internal

Distributed by: **Tint Zone**

Anthony - 066 224 3772

info@tintzone.co.za | tintzone.co.za